

Loop made of 25 mm para-aramid webbing for high resistance to heat, fire and cutting (working temperature up to 350°C, melting temperature > 450°C).


Certified for two types of use:

- EN 795/B and TS 16415 two persons anchoring device, with possibility of installation with double passage or girth hitch;
- EN 354 connection lanyard.


Length: 120 cm



DOUBLE USE

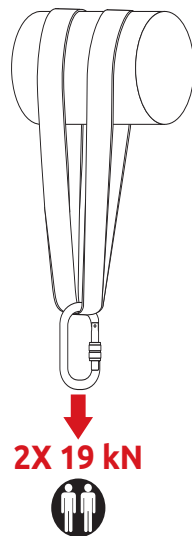

GIRTH HITCH USE

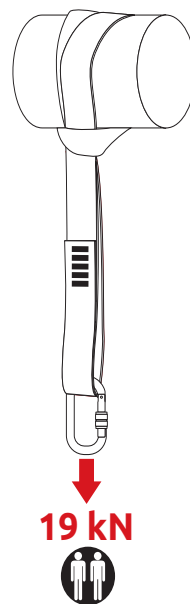

Ref.	Product name	Weight		Strength	CE		STANDARD
		g	oz	kN	EN 354	EN 795/B	TS 16415
3199120	EXPRESS FIRE 120 cm	65	2.3	28	•	•	•